



PRODUCT CATALOGUE

GENERAL

The Shredder Company

www.intimus.com

Contents

ABOUT US	4
PARTICLE SIZES	6
SECURITY LEVELS	8
APPLICATION AREAS	10
1. Paper Destruction	11
1.1 Home/Office Shredders	12
1.2 Autofeed Shredders	28
1.3 Industrial Shredders	32
1.4 Disintegrators	42
2. Media Destruction	44
2.1 Office Shredders	45
2.2 Industrial Shredders	49
3. Cardboard Recycling	55
3.1 Cardboard Recyclers	56
4. Degaussing & Crushing	58
4.1 Degaussers	59
4.2 Crushers	64
5. Consumables	66



The Shredder Company

When the company was founded in 1956, the world was different, as was the nature of information security. Today, the pace of business is accelerating and constantly creating new challenges for how to secure the information we're generating.

Here at intimus, we have long recognized the necessity of keeping pace with information technology, so that we can be a reliable navigator for our clients in this fast-evolving environment. With different classes of information security products we give our clients all the tools necessary to operate more securely and efficiently.

Founded as Schleicher, the intimus brand was born with the introduction of the intimus Simplex, our first office shredder. Since then, intimus has never stopped developing, innovating and

revolutionising the data security market. Today, we employ more than 165 people, with regional offices in 6 countries around the world. Every day, our engineers and technicians work on new solutions and on trimming our products for the future.

Our extensive product portfolio ranges from shredders for paper and media destruction in offices, to large-volume industrial shredders, granulators and disintegrators for central destruction. Our portfolio is completed by degaussers for magnetic data destruction and cardboard recycling machines for the production of packaging materials.

We are proud to present our product catalogue, which gives you a comprehensive overview of the high quality intimus products. Find exactly what you were looking for on 72 pages. Any questions? Get in Contact:



Iñigo Zabalondo
CEO

Phone: +34 692936818
E-mail: izabalondo@intimus.com



Higinio Gil
CSO

Phone: +49 7544 60-245
E-mail: higinio.gil@intimus.com



Peter Dempsey
Managing Director North America

Phone: +1 6174475510
E-mail: peter.dempsey@intimus.com



Isabelle Nexon
International Sales Manager

Phone: +34 636 83 01 40
E-mail: isabelle.nexon@intimus.com



Kalia Roslin-Boetto
Sales Manager France

Phone: +33 6 14591941
E-mail: kalia.roslin-boetto@intimus.com

WE ARE HIRING!

JOIN THE TEAM.



Behind every good product is a team of clever minds. That's why we are always looking for employees to join us in finding new ideas for the future of our products. In addition to new employees with professional experience, we also invest in the next

generation and offer various training opportunities in our company. In parallel to an application for the positions advertised on our homepage, we would also be pleased to receive your unsolicited application at any time.



Appreciative
corporate culture



Reconciling
leisure and work



Corporate
health management



High
recreational value



Employee
benefits

INTERESTED?
APPLY NOW:

www.intimus.com/career



Katjana Herrmann
HR MANAGER

Phone: +49 7544 60-221

E-mail: karriere@intimus.com

Keep your secrets safe!

PARTICLE SIZES ACCORDING TO ISO/IEC 21964

Shredders do not simply destroy, but are an indispensable tool for companies, institutions and private users to protect sensitive data. Seven security levels for different material classifications have been defined in ISO/IEC 21964 (DIN 66399). The higher the security level, the less likely it is that the destroyed media can be reconstructed. Find out which intimus shredder suits your security needs!



Class 1

Normal protection requirement for internal data.

Security level 1

Security rating: Very low

After destruction, the data can be reproduced without special devices but with special time expenditure.

P
Paper
Films
Print forms



P-1

Particle size
≤ 2000 mm²
Strip width ≤ 12 mm
Strip length
not limited

O
CDs/
DVDs
Blu-ray
Discs



O-1

Particle size
≤ 2000 mm²

T
Floppy disks
Magnetic
cassettes
ID cards with
magnetic strips



T-1

Mechanically
inoperable

E
USB sticks
Chip cards
SSDs
Phones/Tablets
Memory cards



E-1

Mechanically/
electronically
inoperable

F
Microfilms



F-1

Particle size
≤ 160 mm²

H
HDDs
with magnetic
data



H-1

Mechanically/
electronically
inoperable

Security level 2

Security rating: Low

After destruction, the data can only be reproduced with special devices and special effort.

P-2

Particle size
≤ 800 mm²
Strip width ≤ 6 mm
Strip length
not limited

O-2

Particle size
≤ 800 mm²

T-2
Cut into several
pieces and
particle size
≤ 2000 mm²

E-2

Medium split

F-2

Particle size
≤ 30 mm²

H-2

Medium damaged

Security level 3

Security rating: Medium

After destruction, the data can only be reproduced with considerable effort (people/special recovery devices/time).

P-3

Particle size
≤ 320 mm²
Strip width ≤ 2 mm
Strip length
not limited

O-3

Particle size
≤ 160 mm²

T-3
Particle size
≤ 320 mm²

E-3
Medium split
and
particle size
≤ 160 mm²

F-3

Particle size
≤ 10 mm²

H-3

Medium deformed

Security level 4

Security rating: Medium

After destruction, the data can only be reproduced with exceptionally high effort (people/special recovery devices/time).

P-4

Particle size
≤ 160 mm²
And for regular
particles:
Strip width ≤ 6 mm

O-4

Particle size
≤ 30 mm²

T-4
Particle size
≤ 160 mm²

E-4
Data carrier (chip) split
and particle size
≤ 30 mm²

F-4

Particle size
≤ 2,5 mm²

H-4

Medium split and
deformed several
times and particle size
≤ 2000 mm²

Security level 5

Security rating: High

After destruction, the data can only be reproduced with the use of non-standard equipment or special constructions as well as forensic methods.

P-5

Particle size
≤ 30 mm²
And for regular
particles:
Strip width ≤ 2 mm

O-5

Particle size
≤ 10 mm²

T-5
Particle size
≤ 30 mm²

E-5
Data carrier (chip)
split several times and
particle size
≤ 10 mm²

F-5

Particle size
≤ 1 mm²

H-5

Medium split and
deformed several
times and particle size
≤ 320 mm²

Security level 6

Security rating: Very high

After destruction, the data is impossible to reproduce according to the state of the art in technology.

P-6

Particle size
≤ 10 mm²
And for regular
particles:
Strip width ≤ 1 mm

O-6

Particle
size/ash
≤ 5 mm²
or melt
product

T-6
Particle size
≤ 10 mm²

E-6
Data carrier (chip)
split several times and
particle size/ash
≤ 1 mm²

F-6

Particle size/ash
≤ 0,5 mm²

H-6

Medium split and
deformed several
times and particle size
≤ 10 mm²

Security level 7

Security rating: Extremely high

After destruction, the data is impossible to reproduce according to the state of the art in science and technology.

P-7

Particle size/melt/ash
≤ 5 mm²
And for regular
particles:
Strip width ≤ 1 mm

O-7

Particle
size/ash
≤ 0,2 mm²
or melt
product

T-7
Particle size/ash
≤ 2,5 mm²
or melt product

E-7
Data carrier (chip)
split several times and
particle size/ash
≤ 0,5 mm²

F-7

Particle
size/ash
≤ 0,2 mm²
or melt
product

H-7

Medium split and
deformed several times
and particle size
≤ 5 mm² or heating
above curie temperature

Class 2

High protection requirement for confidential data.

Class 3

Very high protection requirements for particularly confidential and secret data.

SECURITY LEVELS



Solutions for office:

Medium		P	O	T	E	F	H
Model	mm	Security Level***					
intimus 20	5x28	4	-	4 ²	3 ³	-	-
intimus 1500							
SP2	4 ^{**}	2	-	2 ²	2 ³	-	-
CP4	4,3x33	4	3	4 ²	3 ³	1	-
CP5	2x12	5	-	5 ²	4 ³	2	-
intimus 2500							
SP2	4 ^{**}	2	1	2 ²	2 ³	-	-
CP4	4,3x33	4	3	4 ²	3 ³	1	-
CP5	2x12	5	-	5 ²	4 ³	2	-
intimus 3500							
SP2	4 ^{**}	2	1	2 ²	2 ³	-	-
CP4	4,3x28	4	3	4 ²	3 ³	1	-
CP5	2x10	5	-	5 ²	4 ³	2	-
intimus AutoShred 140	4x12	4	-	4 ²	3 ³	-	-
intimus AutoShred 180	4x12	4	-	4 ²	3 ³	-	-
intimus AutoShred 400	4x12	4	-	-	-	-	-
intimus 45, 60							
SP2	3,8 ^{**}	2	2 ⁵	2 ² 5	2 ³ 5	-	-
CP4	3,8x30	4	3 ⁵	4 ² 5	3 ³ 5	1	-
CP5	1,9x15	5	-	5 ² 5	4 ³ 5	2	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus 85							
CP4	3,8x30	4	3 ⁵	4 ² 5	3 ³ 5	1	-
CP5	1,9x15	5	-	5 ² 5	4 ³ 5	2	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus 100							
CP4	3,8x36	4	3 ⁵	4 ¹ 5	3 ³ 5	1	-
CP5	1,9x15	5	4 ⁵	5 ² 5	4 ³ 5	2	-
CP6	0,8x12	6	-	6 ² 5	5 ³ 5	3	-
CP7	0,8x4,5	7	-	-	-	3	-

Medium		P	O	T	E	F	H
Model	mm	Security Level***					
intimus 120							
CP4	3,8x36	4	3 ⁵	4 ¹ 5	3 ³ 5	1	-
CP5	1,9x15	5	4 ⁵	5 ¹ 5	4 ³ 5	2	-
CP6	0,8x12	6	-	6 ² 5	5 ³ 5	3	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus 130							
CP4	3,8x36	4	3 ⁵	4 ¹ 5	3 ³ 5	1	-
CP5	1,9x15	5	4 ⁵	5 ¹ 5	4 ³ 5	2	-
CP6	0,8x12	6	-	6 ² 5	5 ³ 5	3	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus 175							
CP4	4x40	4	3 ⁵	4 ¹ 5	3 ³ 5	1	-
CP5	1,9x15	5	4 ⁵	5 ¹ 5	4 ³ 5	2	-
CP6	0,8x12	6	-	6 ² 5	5 ³ 5	3	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus 175 hybrid	0,8x4,5/1,2x2 ^M	7	6	6 ²	5 ³	3	-
intimus 205							
CP4	4x40	4	3 ⁵	4 ¹ 5	3 ³ 5	1	-
CP5	1,9x15	5	4 ⁵	5 ¹ 5	4 ³ 5	2	-
CP6	0,8x12	6	-	6 ² 5	5 ³ 5	3	-
CP7	0,8x4,5	7	-	-	-	3	-
intimus H200 VS	3,8x40	4	3	4 ¹	3 ³	1	-
intimus 007 SE	0,8x12	6	-	6 ²	5 ³	3	-
intimus 007 SF	0,8x4,5	7	-	-	-	3	-
intimus 007 SL	0,65x1,5-5	7	-	-	-	-	-
intimus OmniShred	3,6x43	4	3	4 ¹	3 ³	1	-
intimus FlashEx	4x15	-	3	4 ⁴	3	-	-
intimus 360 Crusher	Deformed	-	-	-	-	-	3
intimus 360 Crusher + SSD Destroyer	Deformed	-	-	-	1	-	3
intimus 8000 S Degausser	Erased						
intimus 9000 S Degausser	Erased						
intimus 20000 S Degausser	Erased						
intimus 40000 S Degausser	Erased						

^M Cutting size media

^{**} Strip cut

^{***} Security level according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards.

2 Only ID cards.

3 Only plastic cards with electronic chip.

4 Except from magnetic tape cassette with metal core.

5 No splash protection -

CD and plastic card destruction only with safety glasses.



Solutions for heavy duty/industrial:

Medium		P	O	T	E	F	H
Model	mm	Security Level***					
intimus 200	1,9x15	5	4 ⁵	5 ¹	5 ⁴	3 ¹	2
intimus H200	3,8x40	4	3	4 ¹	3 ³	1	-
intimus 14.95, 14.87							
	6x50	3	2	3 ¹	2 ³	-	-
	3,8x40	4	3	4 ¹	3 ³	1	-
intimus 16.50, 16.86, 16.99 SmartShred							
	10x70	2	2	2 ¹	2 ³	-	-
	6x50	3	3	3 ¹	2 ³	-	-
intimus VZ 14.00	2x15	5	4	5 ¹	4 ³	2	-
intimus XL/XLM 17.00	6x15-50	3	-	-	-	-	-
intimus XL/XLM 19.00	11,8x15-55	2	-	-	-	-	-
intimus VZ/VZM 21.00	11,8x15-55	2	-	-	-	-	-
intimus Disintegrator 150/230, 200/410 ⁶							
	20 [*]	3	2	3 ⁴	2 ³	-	-
	9 [*]	4	3	4 ⁴	3 ³	1	-
	5 [*]	5	4	5 ⁴	4 ³	2	-
	4 [*]	6	5	6 ⁴	5 ³	3	-
	3 [*]	7	6	7 ⁴	5 ³	4	-
	2,15 [*]	7	6	7 ⁴	5 ³	4	-
intimus Disintegrator 260/410 ⁶							
	20 [*]	3	2	3 ⁴	2 ³	-	-
	12 [*]	4	3	4 ⁴	3 ³	1	-
	9 [*]	5	4	5 ⁴	4 ³	2	-
	5 [*]	6	5	6 ⁴	5 ³	3	-
	3 [*]	7	6	7 ⁴	5 ³	4	-
	2,15 [*]	7	6	7 ⁴	5 ³	4	-
intimus Disintegrator 300/450, 300/600 ⁶							
	20 [*]	3	3	3 ⁴	2 ³	-	-
	12 [*]	4	4	4 ⁴	3 ³	1	-
	9 [*]	5	5	5 ⁴	4 ³	2	-
	5 [*]	6	5	6 ⁴	5 ³	3	-
	3,5 [*]	7	6	6 ⁴	5 ³	3	-

Medium		P	O	T	E	F	H
Model	mm	Security Level***					
intimus Disintegrator 600/1000 ⁶							
	20 [*]	3	3	3 ⁴	2 ³	-	-
	12 [*]	4	4	4 ⁴	3 ³	1	-
	9 [*]	5	5	5 ⁴	4 ³	2	-
	5 [*]	7	6	6 ⁴	5 ³	3	-
intimus HDD Gladiator	30 & 12 ^{**}	-	2	2	2	-	3
intimus VZ Multimedia 180	19 ^{**}	-	1	1	2	-	4
intimus HDD Granulator ⁶							
	w/o screen	-	2	2	-	-	3
	14 [*]	-	3	4	-	-	5
	12 [*]	-	3	4	-	-	5
	10 [*]	-	4	5	-	-	5
	8 [*]	-	4	5	-	-	5
	6 [*] (on request)	-	-	-	-	-	5
	3,5 [*] (on request)	-	-	-	-	-	6
intimus SSD Granulator ⁶							
	w/o screen	-	-	4	3	-	-
	5 [*]	-	-	5	4	-	-
	3,5 [*]	-	-	6	5	-	-
	2 [*] (on request)	-	-	6	5	-	-
intimus SSD-HDD Granulator ⁶							
SSD	w/o screen	-	-	4	3	-	-
SSD	5 [*]	-	-	5	4	-	-
SSD	3,5 [*]	-	-	6	5	-	-
SSD	2 [*] (on request)	-	-	6	5	-	-
HDD	w/o screen	-	2	-	-	-	3
HDD	14 [*]	-	3	-	-	-	5
HDD	12 [*]	-	3	-	-	-	5
HDD	8 [*]	-	4	-	-	-	5
HDD	6 [*] (on request)	-	-	-	-	-	5
HDD	3,5 [*] (on request)	-	-	-	-	-	6

* Hole diameter

** Strip cut

*** Security level according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards.






3 Only plastic cards with electronic chip.

4 Except from magnetic tape cassette with metal core.

5 No splash protection – CD and plastic card destruction only with safety glasses.

6 More screens available on request.

APPLICATION AREAS

						
Security Level***	Medium	Up to 3 persons: Home/Small Office	Up to 5 persons: Office	Up to 10 persons: Large Office	Up to 25 persons: Department	Industrial:
1	P					
	O	2500 SP2	3500 SP2			VZ MM180
	T					VZ MM180
	E	360 Crusher + Destroyer				
2	F	1500 CP4 2500 CP4	3500 CP4 45 CP4	60 CP4 85 CP4 100 CP4 120 CP4 OmniShred 85	130 CP4 175 CP4 205 CP4 H200 CP4 VS OmniShred 115	H200 CP4 14.95/14.87 (3,8x40 mm) DIS 150/230, 200/410 (9 mm) DIS 260/410, 300/450, 300/600, 600/1000 (12 mm)
	P	1500 SP2 2500 SP2	3500 SP2 45 SP2	60 SP2		16.50/16.86/16.99 (10x70 mm) XL/XLM 19.00 intimus VZ/VZM 21.00
	O		45 SP2 ⁵	60 SP2 ⁵		14.95/14.87 (6x50 mm) 16.50/16.86/16.99 (10x70/6x50 mm) DIS 150/230, 200/410, 260/410 (20 mm) HDD Gladiator HDD Granulator / SSD-HDD Granulator (w/o screen)
	T	1500 SP2 ² 2500 SP2 ²	3500 SP2 ² 45 SP2 ^{2,5}	60 SP2 ^{2,5}		16.50/16.86/16.99 (10x70 mm) HDD Gladiator HDD Granulator (w/o screen)
3	E	1500 SP2 ³ 2500 SP2 ³	3500 SP2 ³ 45 SP2 ^{3,5}	60 SP2 ^{3,5}		14.95/14.87 (6x50 mm) ³ 16.50/16.86/16.99 (10x70/6x50 mm) ³ DIS 150/230, 200/410, 260/410, 300/450, 600/1000 (20 mm) ³ HDD Gladiator VZ MM 180
	F	1500 CP5 2500 CP5	3500 CP5 45 CP5	60 CP5 85 CP5 100 CP5 120 CP5	130 CP5 175 CP5 205 CP5	200 CP5 VZ 14.00 DIS 150/230, 200/410 (5 mm) DIS 260/410, 300/450, 300/600, 600/1000 (9 mm)
	P					14.95/14.87 (6x50 mm) 16.50/16.86/16.99 (6x50 mm) XL/XLM 17.00 DIS 150/230, 200/410, 260/410, 300/450, 300/600, 600/1000 (20 mm)
	O	1500 CP4 2500 CP4	3500 CP4 45 CP4 ⁵	60 CP4 ⁵ 85 CP4 ⁵ 100 CP4 ⁵ 120 CP4 ⁵ OmniShred 85	130 CP4 ⁵ 175 CP4 ⁵ 205 CP4 ⁵ H200 CP4 VS OmniShred 115 FlashEx	H200 CP4 14.95/14.87 (3,8x40 mm) 16.50/16.86/16.99 (6x50 mm) DIS 150/230, 200/410 (9 mm) DIS 260/410 (12 mm) DIS 300/450, 300/600, 600/1000 (20 mm) HDD Granulator (14/12 mm) SSD-HDD Granulator (14/12 mm)
4	T					14.95/14.87/16.50/16.86/16.99 (6x50 mm) ¹ DIS 150/230, 200/410, 260/410, 300/450, 300/600, 600/1000 (20 mm) ⁴
	E	20 CP4 ³ 1500 CP4 ³ 2500 CP4 ³ AutoShred 140 CP4 ³	3500 CP4 ³ AutoShred 180 CP4 ³ 45 CP4 ^{3,5}	60 CP4 ^{3,5} 85 CP4 ^{3,5} 100 CP4 ^{3,5} 120 CP4 ^{3,5} OmniShred 85 ³	130 CP4 ^{3,5} 175 CP4 ^{3,5} 205 CP4 ^{3,5} H200 CP4 VS ³ OmniShred 115 ³ FlashEx	H200 CP4 ³ 14.95/14.87 (3,8x40 mm) ³ DIS 150/230, 200/410 (9 mm) ³ DIS 260/410, 300/450, 300/600, 600/1000 (12 mm) ³ SSD Granulator / SSD-HDD Granulator (w/o screen)
	F		45 CP7	60 CP7 100 CP6/CP7 120 CP6/CP7	130 CP6/CP7 175 CP6/CP7 175 hybrid 205 CP6/CP7 007 SE/SF	DIS 150/230, 200/410 (4 mm) DIS 260/410, 600/1000 (5 mm) DIS 300/450, 300/600 (5/3,5 mm)
	H	360 Crusher				HDD Gladiator HDD Granulator / SSD-HDD Granulator (w/o screen)
5	P	20 CP4 1500 CP4 2500 CP4 AutoShred 140 CP4	3500 CP4 45 CP4 AutoShred 180 CP4	AutoShred 400 CP4 60 CP4 85 CP4 100 CP4 120 CP4 OmniShred 85	130 CP4 175 CP4 205 CP4 H200 CP4 VS OmniShred 115	H200 CP4 14.95/14.87 (3,8x40 mm) DIS 150/230, 200/410 (9 mm) DIS 260/410 (9 mm) DIS 260/410, 300/450, 300/600, 600/1000 (12 mm)
	O			100 CP5 ⁵ 120 CP5 ⁵	130 CP5 ⁵ 175 CP5 ⁵ 205 CP5 ⁵	200 CP5 ⁵ VZ 14.00 DIS 150/230, 200/410 (5 mm) DIS 260/410 (9 mm) DIS 300/450, 300/600, 600/1000 (12 mm) HDD Granulator (10/8 mm) SSD-HDD Granulator (8 mm)
	T	20 CP4 ² 1500 CP4 ² 2500 CP4 ² AutoShred 140 CP4 ²	3500 CP4 ² AutoShred 180 CP4 ² 45 CP4 ^{2,5}	60 CP4 ^{2,5} 85 CP4 ^{2,5} 100 CP4 ^{2,5} 120 CP4 ^{2,5} OmniShred 85 ¹	130 CP4 ^{2,5} 175 CP4 ^{2,5} 205 CP4 ^{2,5} H200 CP4 VS ¹ OmniShred 115 ¹ FlashEx ⁴	H200 CP4 ¹ 14.95/14.87 (3,8x40 mm) ¹ DIS 150/230, 200/410 (9 mm) ⁴ DIS 260/410, 300/450, 300/600, 600/1000 (12 mm) ⁴ HDD Granulator (14/12 mm) SSD Granulator (w/o screen) SSD-HDD Granulator (w/o screen)
	E	1500 CP5 ³ 2500 CP5 ³	3500 CP5 ³ 45 CP5 ^{3,5}	60 CP5 ^{3,5} 85 CP5 ^{3,5} 100 CP5 ^{3,5} 120 CP5 ^{3,5}	130 CP5 ^{3,5} 175 CP5 ^{3,5} 205 CP5 ^{3,5}	200 CP5 ^{3,5} VZ 14.00 ³ DIS 150/230, 200/410 (5 mm) ³ DIS 260/410, 300/450, 300/600, 600/1000 (9 mm) ³ SSD Granulator/SSD-HDD Granulator (5 mm)
6	F					DIS 150/230, 200/410, 260/410 (3/2,15 mm)
	H					VZ MM180
	P	1500 CP5 2500 CP5	3500 CP5 45 CP5	60 CP5 85 CP5 100 CP5 120 CP5	130 CP5 175 CP5 205 CP5	200 CP5 VZ 14.00 DIS 150/230, 200/410 (5 mm) DIS 260/410, 300/450, 300/600, 600/1000 (9 mm)
	O					DIS 150/230, 200/410 (4 mm) DIS 260/410 (5 mm) DIS 300/450, 300/600 (9/5 mm) DIS 600/1000 (9 mm)
7	T	1500 CP5 ² 2500 CP5 ²	3500 CP5 ² 45 CP5 ^{2,5}	60 CP5 ^{2,5} 85 CP5 ^{2,5} 100 CP5 ^{2,5} 120 CP5 ^{2,5}	130 CP5 ^{2,5} 175 CP5 ^{2,5} 205 CP5 ^{2,5}	200 CP5 ^{2,5} VZ 14.00 ¹ DIS 150/230, 200/410 (5 mm) ⁴ DIS 260/410, 300/450, 300/600, 600/1000 (9 mm) ⁴ HDD Granulator (10/8 mm) SSD Granulator/SSD-HDD Granulator (5 mm)
	E			100 CP6 ^{3,5} 120 CP6 ^{3,5}	130 CP6 ^{3,5} 175 CP6 ^{3,5} 175 hybrid ³ 205 CP6 ^{3,5} 007 SE ³	DIS 150/230, 200/410 (4/3/2,15 mm) ³ DIS 150/230, 200/410 (3/2,15 mm) ³ DIS 260/410 (5/3/2,15 mm) ³ DIS 300/450, 300/600 (5/3,5 mm) ³ DIS 600/1000 (7/5 mm) ³ SSD Granulator/SSD-HDD Granulator (3,5/2 mm)
	H					HDD Granulator (14/12/10/8/6 mm) SSD-HDD Granulator (14/12/8/6 mm)
	P			100 CP6 120 CP6	130 CP6 175 CP6 205 CP6 007 SE	DIS 150/230, 200/410 (4 mm) DIS 260/410, 300/450, 300/600 (5 mm)
8	O				175 hybrid	DIS 150/230, 200/410, 260/410 (3/2,15 mm) DIS 300/450, 300/600 (3,5 mm) DIS 600/1000 (5 mm)
	T			100 CP6 ^{2,5} 120 CP6 ^{2,5}	130 CP6 ^{2,5} 175 CP6 ^{2,5} 175 hybrid ² 205 CP6 ^{2,5} 007 SE ²	DIS 150/230, 200/410 (4 mm) DIS 260/410, 300/450, 300/600, 600/1000 (5 mm) ⁴ DIS 300/450, 300/600 (3,5 mm) ⁴ SSD Granulator/SSD-HDD Granulator (3,5/2 mm)
	H					HDD Granulator (3,5 mm) SSD-HDD Granulator (3,5 mm)
	P		45 CP7	60 CP7 85 CP7 100 CP7 120 CP7	130 CP7 175 CP7 175 hybrid 205 CP7 007 SF/SL	DIS 150/230, 200/410, 260/410 (3/2,15 mm) DIS 300/450, 300/600 (3,5 mm) DIS 600/1000 (5 mm)
9	T					DIS 150/230, 200/410, 260/410 (3/2,15 mm) ⁴

*** Security level according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards.

2 Only ID cards.

3 Only plastic cards with electronic chip.

4 Except from magnetic tape cassette with metal core.

5 No splash protection –

CD and plastic card destruction only with safety glasses.

Paper Destruction

A synthesis of technology, performance and design. All intimus document shredders are built from robust, precision-engineered high-performance components and have a long service life. The product range covers all requirements for daily office and home office shredding to high security destruction of documents according to all current legal requirements such as ISO/IEC 21964 (DIN 66399) or NSA 02/01. All of that achieved with a small ecological footprint and a low noise level. Furthermore, intimus offers a wide range of high capacity shredders for centralized paper destruction that provide the speed and throughput necessary to meet the destruction requirements of businesses, government agencies, NPOs, and other organizations that need to destroy large volumes of documents.

1.1

Home/Office Shredders



intimus 20 CP4

PERFECT FOR SMALL AND HOME OFFICES



20 LITRES



UP TO 3 USERS

- Orders only containers ex works with MOQ 800 pieces
- Noise level: 56 dB(A)*
- Working width: 220 mm
- Easy document shredding thanks to automatic start/stop function.
- The design and finishing meet the highest quality and safety standards.
- Credit cards can also be shredded
- Easy-to-empty 20-litre bin with window
- Width: 34 cm | Depth: 22 cm | Height: 40 cm
- Weight: 6 kg



Orders only
containers ex works.



Various voltage options and
plugs available on request.

Model		Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 20 CP4		5x28 mm	Cross cut	up to 10 ⁶ sheets	P-4 T-4 ² E-3 ³		345 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

intimus 1500

PERFECT FOR SMALL OFFICES OR HOME OFFICES



22 LITRES



UP TO 3 USERS

- Noise level: 65 dB(A)*
- Working width: 220 mm
- Shredder with castors for office use
- Easy document shredding thanks to automatic start/stop function, overheating protection and bin full sensor.
- The design and finishing meet the highest quality and safety standards.
- Can manage staples and clips – credit cards and CDs can also be shredded via a separate feed slot
- Shredding speed (mm/sec): 30 (SP2), 20 (CP4), 25 (CP5)
- Max operating time (min):
8 on / 30 off (SP2), 5 on / 45 off (CP4/CP5)
- The large, easy-to-empty 22-litre bin with window holds up to 200 (SP2), 450 (CP4), 500 (CP5) sheets of paper.
- Width: 35 cm | Depth: 25 cm | Height: 57 cm
- Weight: 7 kg (SP2), 8,5 kg (CP4/CP5)



Orders only
containers ex works.



Various voltage options and
plugs available on request.

Model		Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 1500 SP2		4 mm	Strip cut	up to 12 ⁶ sheets	P-2 T-2 ² E-2 ³		350 W
intimus 1500 CP4		4,3x33 mm	Cross cut	up to 15 ⁶ sheets	P-4 O-3 T-4 ² E-3 ³ F-1		410 W
intimus 1500 CP5		2x12 mm	Cross cut	up to 9 ⁶ sheets	P-5 T-5 ² E-4 ³ F-2		410 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

intimus 2500

PERFECT FOR SMALL OFFICES WITH UP TO 3 PEOPLE



32 LITRES



UP TO 3 USERS

- Noise level dB(A)*: 55 (SP2/CP5), 60 (CP4)
- Working width: 235 mm
- Shredder with castors for office use
- Easy document shredding thanks to automatic start/stop function, overheating protection, automatic reverse and bin full sensor.
- The design and finishing meet the highest quality and safety standards.
- Can manage staples and clips – credit cards and CDs can also be shredded via a separate feed slot
- Shredding speed (mm/sec): 30 (SP2/CP5), 23 (CP4)
- Max operating time (min):
4 on / 45 off (SP2), 8 on / 45 off (CP4/CP5)
- The large, easy-to-empty 32-litre bin with window holds up to 290 (SP2), 650 (CP4), 700 (CP5) sheets of paper.
- Width: 40 cm | Depth: 30 cm | Height: 60 cm
- Weight: 10 kg (SP2), 11 kg (CP4), 11,5 kg (CP5)



Orders only
containers ex works.



Various voltage options and
plugs available on request.

Model		Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 2500 SP2		4 mm	Strip cut	up to 19 ⁶ sheets	P-2 O-1 T-2 ² E-2 ³		320 W
intimus 2500 CP4		4,3x33 mm	Cross cut	up to 17 ⁶ sheets	P-4 O-3 T-4 ² E-3 ³ F-1		440 W
intimus 2500 CP5		2x12 mm	Cross cut	up to 11 ⁶ sheets	P-5 T-5 ² E-4 ³ F-2		440 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

intimus 3500

PERFECT FOR OFFICES WITH UP TO 5 PEOPLE












- Noise level: 55 dB(A)*
- Working width: 230 mm
- Shredder with castors for office use
- Easy document shredding thanks to automatic start/stop function, overheating protection, automatic reverse and bin full sensor.
- The design and finishing meet the highest quality and safety standards.
- Can manage staples and clips – credit cards and CDs can also be shredded via a separate feed slot
- Shredding speed (mm/sec): 37 (SP2), 42 (CP4), 50 (CP5)
- Max operating time (min):
5 on / 55 off (SP2), 20 on / 45 off (CP4/CP5)
- The large, easy-to-empty 42-litre bin with window holds up to 380 (SP2), 860 (CP4), 1000 (CP5) sheets of paper.
- Width: 42 cm | Depth: 34 cm | Height: 66,5 cm
- Weight: 13 kg (SP2), 18 kg (CP4/CP5)



Orders only
containers ex works.



Various voltage options and
plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 3500 SP2	 4 mm	Strip cut	up to 21 ⁶ sheets	P-2 O-1 T-2 ² E-2 ³	  	370 W
intimus 3500 CP4	4,3x28 mm	Cross cut	up to 19 ⁶ sheets	P-4 O-3 T-4 ² E-3 ³ F-1	  	580 W
intimus 3500 CP5	2x10 mm	Cross cut	up to 13 ⁶ sheets	P-5 T-5 ² E-4 ³ F-2	 	580 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus 45

SHREDDER FOR OFFICE USE



45 LITRES








UP TO 5 USERS

- Low noise level: 55 dB(A)* via Silentec system
- Working width: 235 mm
- i-control control panel with clear and intuitive visual indicators:
Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed indicator lights
- Automatic start / stop via photoelectric sensor
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Automatic reverse function for easy resolution of jams
- Can manage staples, clips, credit cards & CDs
- Continuous running
- Exclusive design with wooden cabinet and castors.
- Shredding speed (mm/sec.): 80
- EcoLogic energy saving system with automatic shutdown after 5 minutes of inactivity.
- Also available with automatic oiler (AO)
- Width: 45 cm | Depth: 39 cm | Height: 66 cm
- Weight: 30 kg (SP2), 29 kg (CP4/CP5/CP7)
- Scope of delivery: 100 ml oil and 5 collection bags, 1 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 45 SP2	3,8 mm	Strip cut	up to 21 ⁶ sheets	P-2 O-2 ⁵ T-2 ²⁵ E-2 ³⁵		395 W
intimus 45 CP4	3,8x30 mm	Cross cut	up to 17 ⁶ sheets	P-4 O-3 ⁵ T-4 ²⁵ E-3 ³⁵ F-1		395 W
intimus 45 CP5	1,9x15 mm	Cross cut	up to 12 ⁶ sheets	P-5 T-5 ²⁵ E-4 ³⁵ F-2		395 W
intimus 45 CP7	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W
intimus 45 CP7 AO	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus 60

SHREDDER FOR OFFICE USE



60 LITRES













UP TO 10 USERS

- Low noise level: 55 dB(A)* via Silentec system
- Working width: 235 mm
- i-control control panel with clear and intuitive visual indicators:
Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Automatic start / stop via photoelectric sensor
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Automatic reverse function for easy resolution of jams
- Can manage staples, clips, credit cards & CDs
- Continuous running
- Exclusive design with wooden cabinet and castors.
- Shredding speed (mm/sec.): 80
- EcoLogic energy saving system with automatic shutdown after 5 minutes of inactivity.
- Also available with automatic oiler (AO)
- Width: 45 cm | Depth: 39 cm | Height: 77 cm
- Weight: 31 kg (SP2), 30 kg (CP4/CP5/CP7)
- Scope of delivery: 100 ml oil and 5 collection bags, 1 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 60 SP2	3,8 mm	Strip cut	up to 21 ⁶ sheets	P-2 O-2 ⁵ T-2 ²⁵ E-2 ³⁵	  	395 W
intimus 60 CP4	3,8x30 mm	Cross cut	up to 17 ⁶ sheets	P-4 O-3 ⁵ T-4 ²⁵ E-3 ³⁵ F-1	  	395 W
intimus 60 CP5	1,9x15 mm	Cross cut	up to 12 ⁶ sheets	P-5 T-5 ²⁵ E-4 ³⁵ F-2	 	395 W
intimus 60 CP7	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W
intimus 60 CP7 AO	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus 85

SHREDDER FOR OFFICE USE




85 LITRES





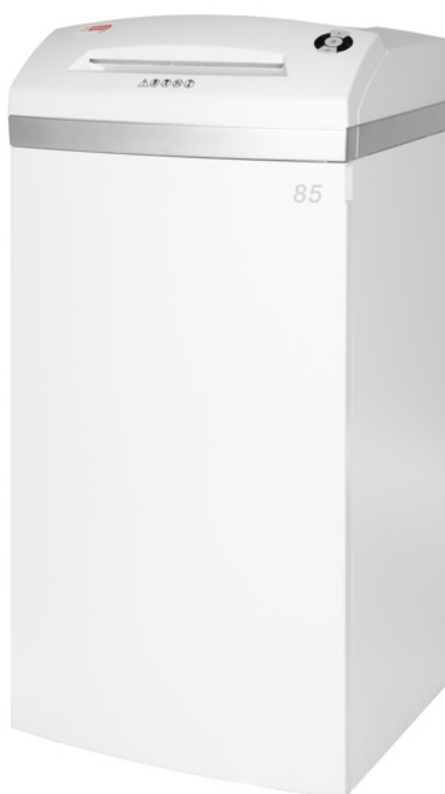

UP TO 10 USERS

- Low noise level: 55 dB(A)* via Silentec system
- Working width: 235 mm
- i-control control panel with clear and intuitive visual indicators:
Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Automatic start / stop via photoelectric sensor
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Automatic reverse function for easy resolution of jams
- Can manage staples, clips, credit cards & CDs
- Continuous running
- Exclusive design with wooden cabinet and castors.
- Shredding speed (mm/sec.): 80
- EcoLogic energy saving system with automatic shutdown after 5 minutes of inactivity.
- Also available with automatic oiler (AO)
- Width: 45 cm | Depth: 39 cm | Height: 99 cm
- Weight: 32 kg
- Scope of delivery: 100 ml oil and 5 collection bags, 1 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 85 CP4	3,8x30 mm	Cross cut	up to 17 ⁶ sheets	P-4 O-3 ⁵ T-4 ²⁵ E-3 ³⁵ F-1		395 W
intimus 85 CP5	1,9x15 mm	Cross cut	up to 12 ⁶ sheets	P-5 T-5 ²⁵ E-4 ³⁵ F-2		395 W
intimus 85 CP7	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W
intimus 85 CP7 AO	0,8x4,5 mm	Cross cut	up to 5 ⁶ sheets	P-7 F-3		395 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus 100







SHREDDER FOR OFFICE USE



- Low noise level: 60 (CP5/CP6), 59 (CP4/CP7) dB(A)*
- Working width: 260 (CP5/CP6), 310 (CP4/CP7) mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- CP4/CP7: i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed / Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- CP5/CP6: Full bin, jam and door open indicator lights
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec):
105 (CP4), 130 (CP5/CP6), 180 (CP7)
- CP5/CP6: Width: 49 cm | Depth: 44 cm | Height: 90 cm
- CP4/CP7: Width: 54 cm | Depth: 40 cm | Height: 90 cm
- Weight: 43 kg (CP5/CP6), 44 kg (CP4/CP7)
- Scope of delivery: 100 ml oil and 5 collection bags, 2 l oil bottle with AO (CP4/CP7)



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 100 CP4	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1/5} E-3 ^{3/5} F-1		770 W
intimus 100 CP5	1,9x15 mm	Cross cut	up to 15 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{2/5} E-4 ^{3/5} F-2		770 W
intimus 100 CP6	0,8x12 mm	Cross cut	up to 12 ⁶ sheets	P-6 T-6 ^{2/5} E-5 ^{3/5} F-3		770 W
intimus 100 CP7	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W
intimus 100 CP4 AO	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1/5} E-3 ^{3/5} F-1		770 W
intimus 100 CP7 AO	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus 120

SHREDDER FOR OFFICE USE



120 LITRES



UP TO 10 USERS

- Low noise level dB(A)*: 59
- Working width: 310 mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec): 125 (SP2), 105 (CP4), 135 (CP5), 130 (CP6), 180 (CP7)
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- Also available with automatic oiler (AO)
- Width: 54 cm | Depth: 40 cm | Height: 98 cm
- Weight: 45 kg
- Scope of delivery: 100 ml oil and 5 collection bags, 2 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 120 CP4	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		770 W
intimus 120 CP5	1,9x15 mm	Cross cut	up to 15 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		770 W
intimus 120 CP6	0,8x12 mm	Cross cut	up to 12 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		770 W
intimus 120 CP7	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W
intimus 120 CP4 AO	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		770 W
intimus 120 CP5 AO	1,9x15 mm	Cross cut	up to 15 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		770 W
intimus 120 CP6 AO	0,8x12 mm	Cross cut	up to 12 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		770 W
intimus 120 CP7 AO	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus 130

SHREDDER FOR OFFICE USE



130 LITRES











UP TO 25 USERS

- Low noise level: 59 (CP4/CP6/CP7), 60 (CP5) dB(A)*
- Working width: 310 (CP4/CP6/CP7), 405 (CP5) mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.

- CP5: Removable paper container
- CP4/CP6/CP7: Metal frame with reusable bag
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec): 105 (CP4), 140 (CP5), 130 (CP6), 180 (CP7)
- Also available with automatic oiler (AO)
- CP5: Width: 66 cm | Depth: 43 cm | Height: 102 cm
- CP4/CP6/CP7: Width: 54 cm | Depth: 40 cm | Height: 110 cm
- Weight: 46 kg (CP4/CP6/CP7), 60 kg (CP5)
- Scope of delivery: 1 x cardboard box, 5 x PE-bag, 1 x 100 ml oil (CP5), 5 x PE-bag, 1 x 100 ml oil (CP4/CP6/CP7), 2 l oil (AO)



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 130 CP4	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		770 W
intimus 130 CP5	1,9x15 mm	Cross cut	up to 15 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		770 W
intimus 130 CP6	0,8x12 mm	Cross cut	up to 12 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		770 W
intimus 130 CP7	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W
intimus 130 CP4 AO	3,8x36 mm	Cross cut	up to 25 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		770 W
intimus 130 CP5 AO	1,9x15 mm	Cross cut	up to 15 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		770 W
intimus 130 CP6 AO	0,8x12 mm	Cross cut	up to 12 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		770 W
intimus 130 CP7 AO	0,8x4,5 mm	Cross cut	up to 8 ⁶ sheets	P-7 F-3		770 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus 175

SHREDDER FOR OFFICE USE



175 LITRES



UP TO 25 USERS

- Low noise level: 54 dB(A)*
- Working width: 405 mm
- Powerful geared motor
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- Removable paper container
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec): 130 (CP4/CP5), 150 (CP6), 230 (CP7)
- Also available with automatic oiler (AO)
- Width: 66 cm | Depth: 56 cm | Height: 105 cm
- Weight: 90 kg
- Scope of delivery: 100 ml oil, collection container with 5 collection bags, 2 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 175 CP4	4x40 mm	Cross cut	up to 43 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		1100 W
intimus 175 CP5	1,9x15 mm	Cross cut	up to 26 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		1100 W
intimus 175 CP6	0,8x12 mm	Cross cut	up to 15 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		1100 W
intimus 175 CP7	0,8x4,5 mm	Cross cut	up to 9 ⁶ sheets	P-7 F-3		1100 W
intimus 175 CP4 AO	4x40 mm	Cross cut	up to 43 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		1100 W
intimus 175 CP5 AO	1,9x15 mm	Cross cut	up to 26 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		1100 W
intimus 175 CP6 AO	0,8x12 mm	Cross cut	up to 15 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		1100 W
intimus 175 CP7 AO	0,8x4,5 mm	Cross cut	up to 9 ⁶ sheets	P-7 F-3		1100 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus 175 hybrid

HIGH-SECURITY DOCUMENT SHREDDER






96 (PAPER) / 45 (CDS) LITRES UP TO 25 USERS

- Low noise level: 52 dB(A)*
- Working width (mm): 265 (paper) + 125 (CD)
- Powerful geared motor
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- Waste separation: Two removable paper containers
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec): 155
- Automatic oiling system
- Width: 66 cm | Depth: 56 cm | Height: 105 cm
- Weight: 92 kg



Various voltage options and plugs available on request.

Model	Cutting size paper	Cutting size media	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 175 hybrid	0,8x4,5 mm	1,2x2 mm ^x	Cross cut	up to 12 ⁶ sheets	P-7 O-6 T-6 ² E-5 ³ F-3	  	1100 W

^x Particle length may vary depending on the material to be destroyed and ambient conditions.

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 **MADE IN GERMANY**

intimus 205

SHREDDER FOR OFFICE USE



- Low noise level: 54 dB(A)*
- Working width: 405 mm
- Powerful geared motor
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- Removable paper container
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- Exclusive design with wooden cabinet and castors
- Shredding speed (mm/sec): 130 (CP4/CP5), 150 (CP6), 230 (CP7)
- Also available with automatic oiler (AO)
- Width: 66 cm | Depth: 56 cm | Height: 116 cm
- Weight: 93 kg
- Scope of delivery: 100 ml oil, collection container with 5 collection bags, 2 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 205 CP4	4x40 mm	Cross cut	up to 43 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		1100 W
intimus 205 CP5	1,9x15 mm	Cross cut	up to 26 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		1100 W
intimus 205 CP6	0,8x12 mm	Cross cut	up to 15 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		1100 W
intimus 205 CP7	0,8x4,5 mm	Cross cut	up to 9 ⁶ sheets	P-7 F-3		1100 W
intimus 205 CP4 AO	4x40 mm	Cross cut	up to 43 ⁶ sheets	P-4 O-3 ⁵ T-4 ^{1 5} E-3 ^{3 5} F-1		1100 W
intimus 205 CP5 AO	1,9x15 mm	Cross cut	up to 26 ⁶ sheets	P-5 O-4 ⁵ T-5 ^{1 5} E-4 ^{3 5} F-2		1100 W
intimus 205 CP6 AO	0,8x12 mm	Cross cut	up to 15 ⁶ sheets	P-6 T-6 ^{2 5} E-5 ^{3 5} F-3		1100 W
intimus 205 CP7 AO	0,8x4,5 mm	Cross cut	up to 9 ⁶ sheets	P-7 F-3		1100 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus 007 SE / SF / SL







HIGH SECURITY, HEAVEY-DUTY SHREDDER FOR OFFICE USE



- Low noise level: 58 dB(A)*
- Working width: 300 mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips and credit cards (SE)
- Full bin, paper jam and door open indicator lights
- Removable paper container
- Exclusive design with metal cabinet and castors
- Shredding speed (mm/sec): 190 (SE), 230 (SF) and 100 (SL)
- Also available with automatic oiler (AO)
- Width: 70 cm | Depth: 55 cm | Height: 112 cm
- Weight: 142 kg (SE) / 109 kg (SF) / 170 kg (SL)
- Scope of delivery: 100 ml oil, collection container with 5 collection bags, 2 l oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 007 SE	0,8x12 mm	Cross cut	up to 13 ⁶ sheets	P-6 T-6 ² E-5 ³ F-3		1100 W
intimus 007 SE AO	0,8x12 mm	Cross cut	up to 13 ⁶ sheets	P-6 T-6 ² E-5 ³ F-3		1100 W
intimus 007 SF	0,8x4,5 mm	Cross cut	up to 11 ⁶ sheets	P-7 F-3		1100 W
intimus 007 SF AO	0,8x4,5 mm	Cross cut	up to 11 ⁶ sheets	P-7 F-3		1100 W
intimus 007 SL	0,65x1,5-5 mm	Cross cut	up to 10 ⁶ sheets	P-7		1100 W
intimus 007 SL AO	0,65x1,5-5 mm	Cross cut	up to 10 ⁶ sheets	P-7		1100 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus OmniShred 85 / intmus OmniShred 115

POWERFUL, MULTIFUNCTIONAL SHREDDER FOR OFFICE USE



68 / 115 LITRES



UP TO 10-25 USERS

- Low noise level: 63 dB(A)*
- Working width: 305 / 250x130 mm
- Smart feeding options for maximum user flexibility
- Can manage a variety of material: paper sheets or crumpled paper, cardboard, foil-laminated documents, ID cards, fob keys, credit cards, passports, CDs, DVDs, floppy disks and USB sticks.
- The top feeder is secured against splinters with a transparent sliding door allowing to follow the destruction process.
- Equipped with an automatic oiler and i-control panel with clear and intuitive visual indications
- Continuous running
- Automatic start / stop via photoelectric sensor
- A permanent automatic forward and reverse function prevents jams in case of overload without overheating
- With wooden cabinet and mounted on castors
- Shredding speed (paper): 160 mm/sec
- EcoLogic energy saving system with automatic shutdown after 5 minutes of inactivity.
- Width: 66 cm | Depth: 55 cm | Height: 81 (85) / 108,5 (115) cm
- Weight: 90 kg (85) / 100 kg (115)



Various voltage options and plugs available on request.

Model	Bin	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus OmniShred 85	68 l	3,6x43 mm	Cross cut	up to 30 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		1100 W
intimus OmniShred 115	115 l	3,6x43 mm	Cross cut	up to 30 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		1100 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

1.2

Autofeed Shredders



intimus AutoShred 140

FULLY AUTOMATIC DOCUMENT SHREDDER



20 LITRES



UP TO 3 USERS

- At 54 dB(A)*, it is particularly quiet in operation and ensures a convenient working environment.
- The construction and finishing meet the highest quality and safety standards.
- Mounted on castors for easy mobility and flexible use.
- Simple operation with clear LED status indicators and bin full sensor.
- 140 sheets of 80 g/m² paper with paperclips and staples can be fed via auto-feed.
- Credit cards and up to 10 sheets of 80 g/m² paper can be shredded via the manual feed.
- The large and easily removeable 20-litre waste bin can hold up to 380 sheets of paper.
- The 4x12 mm particles comply with security level P-4 according to DIN 66399 (ISO/IEC 21964).
- An overheating protection and clever anti-paper jam protection technology ensure a particularly long operating time of 60 minutes without interruption.
- Even when you have already finished work, the AutoShred continues to work reliably for you.
- Once the work is done, it switches off automatically after 5 minutes.
- Width: 37 cm | Depth: 28 cm | Height: 50 cm
- Weight: 11 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus AutoShred 140 CP4	4x12 mm	Cross cut	Manual: up to 10 ⁶ sheets Autofeed: up to 140 ⁶ sheets	P-4 T-4 ² E-3 ³		345 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

intimus AutoShred 180

FULLY AUTOMATIC DOCUMENT SHREDDER



32 LITRES




UP TO 5 USERS

- At 58 dB(A)*, it is particularly quiet in operation and ensures a convenient working environment.
- The construction and finishing meet the highest quality and safety standards.
- Mounted on castors for easy mobility and flexible use.
- Simple operation via touchscreen with clear LED status indicators and bin full sensor.
- 180 sheets of 80 g/m² paper with paperclips and staples can be fed via auto-feed.
- Credit cards and up to 10 sheets of 80 g/m² paper can be shredded via the manual feed.
- The large and easily removeable 32-litre waste bin can hold up to 500 sheets of paper.
- The 4x12 mm particles comply with security level P-4 according to DIN 66399 (ISO/IEC 21964).
- An overheating protection and clever anti-paper jam protection technology ensure a particularly long operating time of 120 minutes without interruption.
- Even when you have already finished work, the AutoShred continues to work reliably for you.
- Once the work is done, it switches off automatically after 5 minutes.
- Width: 36 cm | Depth: 47 cm | Height: 48 cm
- Weight: 16 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus AutoShred 180 CP4	4x12 mm	Cross cut	Manual: up to 10 ⁶ sheets Autofeed: up to 180 ⁶ sheets	P-4 T-4 ² E-3 ³		345 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

intimus AutoShred 400

FULLY AUTOMATIC DOCUMENT SHREDDER



55 LITRES



UP TO 10 USERS

- At 56 dB(A)*, it is particularly quiet in operation and ensures a convenient working environment.
- The construction and finishing meet the highest quality and safety standards.
- Mounted on castors for easy mobility and flexible use.
- Simple operation via touchscreen with clear LED status indicators and bin full sensor.
- 400 sheets of 80 g/m² paper with paperclips and staples can be fed via auto-feed.
- Credit cards, CDs and up to 10 sheets of 80 g/m² paper can be shredded via the manual feed.
- The large and easily removeable 55-litre waste bin can hold up to 670 sheets of paper.
- The 4x12 mm particles comply with security level P-4 according to DIN 66399 (ISO/IEC 21964).
- An overheating protection and clever anti-paper jam protection technology ensure a particularly long operating time of 240 minutes without interruption.
- A 4-digit code protects the documents against unauthorized removal.
- Even when you have already finished work, the AutoShred continues to work reliably for you.
- Once the work is done, it switches off automatically after 5 minutes.
- Width: 40 cm | Depth: 50 cm | Height: 76 cm
- Weight: 23 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus AutoShred 400 CP4	4x12 mm	Cross cut	Manual: up to 10 ⁶ sheets Autofeed: up to 400 ⁶ sheets	P-4		345 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

1.3

Industrial Shredders



 **MADE IN GERMANY**

intimus 200



HEAVY-DUTY SHREDDER



- Low noise level: 55 dB(A)*
- Working width: 444 mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs
- Bin full sensor and also indicator lights for paper jam and door open
- Metal frame with reusable bag
- Exclusive design with metal cabinet and castors
- Continuous running
- Shredding speed: 300 mm/sec
- Also available with automatic oiler (AO)
- Width: 75 cm | Depth: 55 cm | Height: 128 cm
- Weight: 202 kg
- Scope of delivery: 100 ml, 5 bags, 2 litres with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 200 CP5	1,9x15 mm	Cross cut	up to 38 ⁶ sheets	P-5 O-4 ⁵ T-5 ¹ E-4 ³ F-2		2600 W
intimus 200 CP5 AO	1,9x15 mm	Cross cut	up to 38 ⁶ sheets	P-5 O-4 ⁵ T-5 ¹ E-4 ³ F-2		2600 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹ Only floppy disks / ID cards. ³ Only plastic cards with electronic chip. ⁴ Except from magnetic tape cassette with metal core. ⁶ Under test conditions. All data without liability. Subject to technical and optical changes.

PAPER DESTRUCTION

 MADE IN GERMANY

intimus H200 / VS

HEAVY-DUTY SHREDDER



200 LITRES






INDUSTRIAL

- Low noise level dB(A)*: 55 (H200) / 48-69 (H200 VS)
- Working width: 444 mm
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, clips, credit cards and CDs and crumpled paper
- Bin full sensor and also indicator lights for paper jam, door open and hopper open
- Metal frame with reusable bag

- Exclusive design with metal cabinet and castors
- Adjustable cutting speed (55–280 mm/s) for optimal efficiency, reducing energy use and processing time.
- Shredding speed (mm/sec): 240 (H200) / 55–280 (H200 VS)
- Continuous running
- Also available with automatic oiler (AO)
- Width: 75 cm | Depth: 55 cm | Height: 180 cm
- Weight: 217 kg (H200) / 218 kg (H200 VS)
- Scope of delivery: 100 ml oil, collection container with 5 collection bags, 2 litre oil bottle with AO



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus H200 CP4	3,8x40 mm	Cross cut	up to 75 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		2600 W
intimus H200 CP4 AO	3,8x40 mm	Cross cut	up to 75 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		2600 W
intimus H200 CP4 VS	3,8x40 mm	Cross cut	up to 65 ⁶ x sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		2600 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹ Only floppy disks / ID cards. ³ Only plastic cards with electronic chip. ⁴ Except from magnetic tape cassette with metal core. ⁶ Under test conditions. All data without liability. Subject to technical and optical changes. x At maximum speed

intimus 14.95

INDUSTRIAL SHREDDER WITH HEAVY-DUTY CONVEYOR BELT



P-3: 325 KG/H | P-4: 230 KG/H**** 400 LITRES

- Low noise level: 61 dB(A)*
- Working width: 440 mm
- Effortless document shredding with internal conveyor belt, dosage paddles, auto reverse, overload protection, bin full sensor
- Can manage staples, clips, credit cards, CDs, crumpled paper and floppy disks
- Easy operation with indicator lights for bin full, door open, material jam
- Metal frame with reusable collecting bag as standard waste disposal
- Optional: Large removable container located below the cutting mechanism
- On castors for flexible use
- Shredding speed: 300 mm/sec
- Optional available with automatic oiler, emergency stop bar, extraction system and table extension
- Fits through any standard door
- Width: 80 cm (table extension optional to 105 cm) | Depth: 167 cm | Height: 169 cm
- Weight: 443 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 14.95 CP3	6x50 mm	Cross cut	up to 120 ⁶ sheets	P-3 O-2 T-3 ¹ E-2 ³		4000 W
intimus 14.95 CP4	3,8x40 mm	Cross cut	up to 95 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		4000 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹Only floppy disks / ID cards. ³Only plastic cards with electronic chip. ⁴Except from magnetic tape cassette with metal core. ⁶Under test conditions. All data without liability. Subject to technical and optical changes.

intimus 14.87

SHREDDER BALER COMBINATION



P-3: 325 KG/H | P-4: 230 KG/H****

- Low noise level: 61 dB(A)*
- Working width: 440 mm
- Effortless document shredding with internal conveyor belt, dosage paddles, auto reverse, overload protection, bin full sensor
- Can manage staples, clips, credit cards, CDs, crumpled paper and floppy disks
- Easy operation with indicator lights for bin full, door open, material jam
- Shredding speed: 300 mm/sec
- The shredded material is compacted into bales to reduce its volume by up to 70%
- Optional available with automatic oiler, emergency stop bar, extraction system and table extension
- Fits through any standard door
- Width: 80 cm (table extension optional to 105 cm) | Depth: 268 cm | Height: 169 cm
- Weight: Shredder: 364 kg / Baler: 550 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 14.87 CP3	6x50 mm	Cross cut	up to 120 ⁶ sheets	P-3 O-2 T-3 ¹ E-2 ³		8000 W
intimus 14.87 CP4	3,8x40 mm	Cross cut	up to 95 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		8000 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power.***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹ Only floppy disks / ID cards. ³ Only plastic cards with electronic chip. ⁴ Except from magnetic tape cassette with metal core. ⁶ Under test conditions. All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus 16.50 SmartShred



INDUSTRIAL SHREDDER WITH HEAVY-DUTY CONVEYOR BELT


P-2: 550 KG/H | P-3: 480 KG/H** 450 LITRES**

- Low noise level: 61 dB(A)*
- Working width: 500 mm
- Effortless document shredding with high capacity conveyor belt and automatic reverse in case of material jams
- Can manage staples, clips, credit cards, CDs and entire folders
- Stops automatically when the collection container is full
- Equipped with an intelligent automatic oiler as standard
- Intuitive touchscreen
- The SmartShred programmable logic controller (PLC) enables language selection, recording of operating hours, display of all machine processes, precise error display or maintenance reminders
- Shredding speed: 240 mm/sec
- Robust metal housing and mobile collection container
- Equipped with an emergency stop bar
- Suction system available as an option
- Width: 121 cm | Depth: 195 cm | Height: 163 cm
- Weight: 726 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity**/ 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 16.50 CP2	10x70 mm	Cross cut	up to 450 ⁶ sheets	P-2 O-2 T-2 E-2 ³		7500 W
intimus 16.50 CP3	6x50 mm	Cross cut	up to 290 ⁶ sheets	P-3 O-2 T-3 E-2 ³		7500 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹Only floppy disks / ID cards. ³Only plastic cards with electronic chip. ⁴Except from magnetic tape cassette with metal core. ⁶Under test conditions. All data without liability. Subject to technical and optical changes.

intimus 16.86 SmartShred

INDUSTRIAL SHREDDER BALER COMBINATION





P-2: 550 KG/H | P-3: 480 KG/H****

- Noise level: 61 dB(A)*
- Working width: 500 mm
- Intuitive touchscreen
- The SmartShred programmable logic controller (PLC) enables language selection, recording of operating hours, display of all machine processes, precise error display or maintenance reminders
- Effortless document shredding with high capacity conveyor belt and automatic reverse in case of material jams
- Can manage staples, clips, credit cards, CDs and entire folders
- Stops automatically when the collection container is full
- The shredded material is compacted into bales to reduce its volume by up to 70%
- Shredding speed: 240 mm/sec
- Equipped with an intelligent automatic oiler as standard
- The model range offers various discharge options: Collection bin for collecting the loose cutting material, baler for compaction of particles, horizontal discharge belt for connection of a conveyor belt or collection bin and other customised solutions
- Robust metal housing
- Equipped with an emergency stop bar
- Suction system available as an option
- Width: 121 cm | Depth: 284 cm | Height: 163 cm
- Weight: Shredder: 706 kg / Baler: 550 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 16.86 CP2	10x70 mm	Cross cut	up to 450 ⁶ sheets	P-2 O-2 T-2 ¹ E-2 ³		11500 W
intimus 16.86 CP3	6x50 mm	Cross cut	up to 290 ⁶ sheets	P-3 O-2 T-3 ¹ E-2 ³		11500 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹ Only floppy disks / ID cards. ³ Only plastic cards with electronic chip. ⁴ Except from magnetic tape cassette with metal core. ⁶ Under test conditions. All data without liability. Subject to technical and optical changes.

 **MADE IN GERMANY**

intimus 16.99 SmartShred



HEAVY DUTY SHREDDER WITH AUTOMATIC CONVEYOR BELT FEEDING


P-2: 550 KG/H | P-3: 480 KG/H****

- Noise level: 61 dB(A)*
- Working width: 500 mm
- Intuitive touchscreen
- The SmartShred programmable logic controller (PLC) enables language selection, recording of operating hours, display of all machine processes, precise error display or maintenance reminders
- Depending on the variant, the hardened cutter cylinders made of high-quality steel destroy even complete file folders and ensure a long service life
- Shredding material: Paper or crumpled paper with staples and paper clips, smart cards, floppy disks, CDs and DVDs (Variant P-2: as well as small quantities of entire folders and books)
- High performance through efficient and continuous feeding of documents by means of an automatic feeding conveyor belt
- The model range offers various discharge options: Collection bin for collecting the loose cutting material, baler for compaction of particles, horizontal discharge belt for connection to a conveyor belt or collection bin and other customised solutions
- In case of overload, the cutting unit and conveyor belt reverse automatically and switch back to forward running after some time.
- Stops automatically when the collection container is full
- Equipped with an intelligent automatic oiler as standard
- Robust metal housing
- Equipped with an emergency stop bar
- Suction system available as an option



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 16.99 SmartShred (P-2)	10x70 mm	Cross cut	up to 450 ⁶ sheets	P-2 O-2 T-2 E-2 ³		7500 W (shredder)
intimus 16.99 SmartShred (P-3)	6x50 mm	Cross cut	up to 290 ⁶ sheets	P-3 O-2 T-3 E-2 ³		7500 W (shredder)

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹Only floppy disks / ID cards. ³Only plastic cards with electronic chip. ⁴Except from magnetic tape cassette with metal core. ⁶Under test conditions. All data without liability. Subject to technical and optical changes.

intimus VZ 14.00

HIGH-SECURITY SHRED PRESS COMBINATION



245 KG/H****

- Noise level: 66–68 dB(A)*
- Working width: 500 mm
- Intuitive touchscreen
- The SmartShred programmable logic controller (PLC) enables language selection, recording of operating hours, display of all machine processes, precise error display or maintenance reminders
- The hardened cutter cylinders made of high-quality steel destroy even stapled material and ensure a long service life.
- Can manage staples, paper clips, credit cards, CDs and floppy disks
- High performance in the high security area by efficient and continuous feeding of documents by conveyor belt
- Automatic control of pre- and post-shredder
- A built-in automatic lubricator ensures consistently high cutting performance and quality
- Powerful, thermo-protected geared motors guarantee smooth continuous operation
- In the event of an overload, both cutting units reverse automatically and then return to normal operation
- Optionally available with a collection bin
- Width: 109 cm | Depth: 305 cm | Height: 167 cm
- Weight: Shredder: 859 kg / Baler: 565 kg
- Robust metal housing
- Equipped with an emergency stop bar
- Suction system available as an option



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus VZ14.00	2x15 mm	Cross cut	up to 90 ⁶ sheets	P-5 O-4 T-5 ¹ E-4 ³ F-2	   	11300 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. ¹ Only floppy disks / ID cards. ³ Only plastic cards with electronic chip. ⁴ Except from magnetic tape cassette with metal core. ⁶ Under test conditions. All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus XL/XLM 17.00/19.00 & intimus VZ/VZM 21.00

HIGH PERFORMANCE MODULAR SHREDDING SYSTEM



600 – 3100 KG/H***

- Working width: up to 700 mm
- Shreds paper
- Two-stage machines: Rugged pre-shredder with large, stable knives to cut through thick stacks of material followed by a security shredder to achieve the data security levels
- Automatic feed of material to pre-shredder via large feed conveyor and hopper for manual loading
- Precision cutting cylinders made from special hardened steel allow for high throughput volumes with minimal wear and low power consumption
- PLC-control with touchscreen
- XLM shredders are equipped with an integrated magnetic metal separator



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Throughput*	Security level**	Also shreds	Nominal motor power
intimus XL17.00	6x15-50 mm	Cross cut	up to 600 ⁶ kg/h	P-3		19300 W
intimus XLM17.00	6x15-50 mm	Cross cut	up to 600 ⁶ kg/h	P-3		20000 W
intimus XL19.00	11,8x15-55 mm	Cross cut	up to 900 ⁶ kg/h	P-2		23300 W
intimus XLM19.00	11,8x15-55 mm	Cross cut	up to 900 ⁶ kg/h	P-2		24000 W
intimus VZ21.00	11,8x15-55 mm	Cross cut	up to 3100 ⁶ kg/h	P-2		40000/55000 W
intimus VZM21.00	11,8x15-55 mm	Cross cut	up to 3100 ⁶ kg/h	P-2		40000/55000 W

Performance data and dimensions may vary depending on accessories. *Theoretical average performance paper/hour. **according to DIN 66399 (ISO/IEC 21964) ***All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality.

1 Only floppy disks / ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

6 Under test conditions. All data without liability. Subject to technical and optical changes.

1.4

Disintegrators





intimus Disintegrators

FOR THE HIGHEST SAFETY REQUIREMENTS



13 – 2 000 KG/H****

- Noise level: 100 – 110 dB(A)*
- Working width: 230 – 1 000 mm
- The particle sizes and the achievable security levels of a disintegrator depend on the perforation of the screen used. With our intimus disintegrators, you can change screens in minutes and customize the machine to meet your specific security requirements
- Screens are available for security levels 3 to 7 according to DIN 66399. Even the strictest NSA standards of the US government are met.
- For maximum throughput and best durability, the screens are made of thick, drilled (not punched) steel plate with optimized hole spacing and geometries
- Shredder material: paper documents (with staples and paper clips), banknotes, passports, ID cards, smart cards, floppy disks, CDs and DVDs
- Thanks to generous working widths, all common paper and EDP formats can be easily fed, depending on the model
- A clearly arranged panel facilitates operation
- The rotors are manufactured out of one solid steel block. The outstanding balance allows for vibration-free running, high throughput and low energy-consumption
- The durable knives are made of high-quality hardened tool steel. Worn or damaged knives can be easily replaced or resharpened by any dealer
- The upper part of the housing can be folded back. The wide-opening chassis allows best accessibility to the screen as well as to all rotor and stator knives for convenient and fast replacement
- For all disintegrators, optional customized soundproof booths or exhaust systems are available
- For larger models from DIS 300/450, optional feed belts and complex systems are also available



intimus DIS 150/230

Width: 65 cm
Depth: 80 cm
Height: 125 cm
Weight: approx. 230 kg



intimus DIS 200/410

Width: 88 cm
Depth: 120 cm
Height: 150 cm
Weight: approx. 615 kg



intimus DIS 260/410

Width: 88 cm
Depth: 120 cm
Height: 150 cm
Weight: approx. 770 kg



intimus DIS 300/450

Width: 115 cm
Depth: 160 cm
Height: 250 cm
Weight: approx. 2 400 kg



intimus DIS 300/600

Width: 130 cm
Depth: 160 cm
Height: 250 cm
Weight: approx. 2 600 kg



intimus DIS 600/1000

Width: 170 cm
Depth: 210 cm
Height: 325 cm
Weight: approx. 7 200 kg



Various voltage options and plugs available on request.

Model	Throughput**	Working width	Rotor diameter	Security level***	Nominal motor power
intimus DIS 150/230	up to 40 ⁶ kg/h	230 mm	150 mm	P-3 – P-7 O-2 – O-6 T-3 – T-7 ⁴ E-2 – E-5 ³ F-1 – F-4	4000 W
intimus DIS 200/410	up to 200 ⁶ kg/h	410 mm	200 mm	P-3 – P-7 O-2 – O-6 T-3 – T-7 ⁴ E-2 – E-5 ³ F-1 – F-4	7500 W
intimus DIS 260/410	up to 320 ⁶ kg/h	410 mm	260 mm	P-3 – P-7 O-2 – O-6 T-3 – T-7 ⁴ E-2 – E-5 ³ F-1 – F-4	11000 W
intimus DIS 300/450	up to 530 ⁶ kg/h	450 mm	300 mm	P-3 – P-7 O-3 – O-6 T-3 – T-6 ⁴ E-2 – E-5 ³ F-1 – F-3	18000/30000 W
intimus DIS 300/600	up to 700 ⁶ kg/h	600 mm	300 mm	P-3 – P-7 O-3 – O-6 T-3 – T-6 ⁴ E-2 – E-5 ³ F-1 – F-3	22000/30000 W
intimus DIS 600/1000	up to 2000 ⁶ kg/h	1000 mm	600 mm	P-3 – P-7 O-3 – O-6 T-3 – T-6 ⁴ E-2 – E-5 ³ F-1 – F-3	75000/110000 W

Performance data and dimensions may vary depending on accessories. *Noise level in idle operation. **Theoretical average performance paper/hour. ***according to DIN 66399 (ISO/IEC 21964) ****All specifications refer to paper shredding. Performance may vary depending on feeding type and paper quality. *****Illustrations not true to scale. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core. 6 Under test conditions. All data without liability. Subject to technical and optical changes.

2.

Media Destruction

With the increasing demand of digital data carrier, many businesses and organizations now have huge inventories of obsolete hard drives, flash memory and other media that need to be securely destroyed due to the sensitive data they contain. For this reason, intimus has developed a comprehensive range of physical media destroyers that can shred, crush and even granulate physical media so that its data can no longer be recovered. We offer a wide range of digital media destruction products for the secure disposal of hard drives, optical discs, flash memory, credit cards and other media for both office and industrial use.



2.1

Office Shredders



intimus 175 hybrid

HIGH-SECURITY DOCUMENT SHREDDER






96 (PAPER) / 45 (CDS) LITRES UP TO 25 USERS

- Low noise level: 52 dB(A)*
- Working width (mm): 265 (paper) + 125 (CD)
- Powerful geared motor
- Automatic start / stop via photoelectric sensor
- Automatic reverse function for easy resolution of jams caused by paper overload
- Can manage staples, credit cards and CDs
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- Easy visualisation of the paper load level by Dynamic Load Sensor
- Continuous running
- EcoLogic energy saving system with automatic shutdown after 15 minutes of inactivity.
- Waste separation: Two removable paper containers
- Exclusive design with wooden cabinet and castors
- Shredding speed: 155 mm/sec
- Automatic oiling system
- Width: 66 cm | Depth: 56 cm | Height: 105 cm
- Weight: 92 kg



Various voltage options and plugs available on request.

Model	Cutting size paper	Cutting size media	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus 175 hybrid	0,8x4,5 mm	1,2x2 mm ^x	Cross cut	up to 12 ⁶ sheets	P-7 O-6 T-6 ² E-5 ³ F-3	  	1100 W

^x Particle length may vary depending on the material to be destroyed and ambient conditions.

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

 **MADE IN GERMANY**

intimus OmniShred 85 / intmus OmniShred 115

POWERFUL, MULTIFUNCTIONAL SHREDDER FOR OFFICE USE



68 / 115 LITRES





UP TO 10-25 USERS

- Low noise level: 63 dB(A)*
- Working width: 305 / 250x130 mm
- Smart feeding options for maximum user flexibility
- Can manage a variety of material: paper sheets or crumpled paper, cardboard, foil-laminated documents, ID cards, fob keys, credit cards, passports, CDs, DVDs, floppy disks and USB sticks.
- The top feeder is secured against splinters with a transparent sliding door allowing to follow the destruction process.
- Equipped with an automatic oiler and i-control panel with clear and intuitive visual indications
- Continuous running
- Automatic start / stop via photoelectric sensor
- A permanent automatic forward and reverse function prevents jams in case of overload without overheating
- With wooden cabinet and mounted on castors
- Shredding speed (paper): 160 mm/sec
- EcoLogic energy saving system with automatic shutdown after 5 minutes of inactivity.
- Width: 66 cm | Depth: 55 cm | Height: 81 (85) / 108,5 (115) cm
- Weight: 90 kg (85) / 100 kg (115)



Various voltage options and plugs available on request.

Model	Bin	Cutting size	Cutting type	Sheet capacity** / 80 g/m ²	Security level***	Also shreds	Nominal motor power
intimus OmniShred 85	68 l	3,6x43 mm	Cross cut	up to 30 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		1100 W
intimus OmniShred 115	115 l	3,6x43 mm	Cross cut	up to 30 ⁶ sheets	P-4 O-3 T-4 ¹ E-3 ³ F-1		1100 W

*Noise level in idle operation. **Sheet capacity can vary based on paper weight and electrical power. ***according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip. 4 Except from magnetic tape cassette with metal core.

5 No splash protection - CD and plastic card destruction only with safety glasses. 6 Under test conditions.

All data without liability. Subject to technical and optical changes.

MEDIA DESTRUCTION

 MADE IN GERMANY

intimus FlashEx

FLASH MEDIA SHREDDER FOR OFFICE USE



25 LITRES



UP TO 25 USERS

- Low noise level: 65 dB(A)*
- Working width: 165 mm
- The FlashEx has a solid cutting head which grabs the material with specially designed claw like cutting cylinders pulling material into the unit
- This allows you to insert USB thumb drives, SSDs, smartphones, mobile phones, mini tablets without batteries and CDs
- Shredding capacity: up to 1090 2,5" SSDs / 100 mobile phones / 100 tablets / 500 USB sticks / 1500 CDs / 1000 floppy disks per hour
- i-control control panel with clear and intuitive visual indicators: Ready, material jam, door open, electrical fault, motor overload, bin full, oil needed
- EcoLogic energy saving system with automatic shutdown after 10 minutes of inactivity
- Width: 58 cm | Depth: 61 cm | Height: 98 cm
- Weight: 116 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Security level**	Also shreds	Nominal motor power
intimus FlashEx	4x15 mm	Cross cut	O-3 T-4 ⁴ E-3		1100 W

*Noise level in idle operation. **according to DIN 66399 (ISO/IEC 21964)

1 Only floppy disks / ID cards. 2 Only ID cards. 3 Only plastic cards with electronic chip.

4 Except from magnetic tape cassette with metal core. 5 No splash protection - CD and plastic card destruction only with safety glasses.

All data without liability. Subject to technical and optical changes.

2.3

Industrial Shredders



intimus HDD Gladiator

HIGH-PERFORMANCE SHREDDER FOR OPTICAL AND MAGNETIC MEDIA



400 2,5" HDDs/H**



120 LITRES

- Low noise level: 66 dB(A)*
- Working width chamber 1: 145 mm
- Working width chamber 2: 135 mm
- Handles up to 150 3,5" enterprise HDD's, even with server frame
- Fast, reliable and easy to use
- Clear ON/OFF and reverse buttons
- Specially hardened blades
- Lockable master switch
- Automatic reverse in case of overload
- Shredded material collected in standard 120-litre waste bin
- To ensure maximum performance, the hard drives are fed into the feed flap on the left which uses 30-mm blades specially designed for hard drives
- The feed flap on the right is used for optical media, SSD, tape drives, etc. It uses 12-mm blades specially designed for lightweight supports
- Display with integrated hour meter
- Width: 104 cm | Depth: 84 cm | Height: 168 cm
- Weight: 540 kg



Various voltage options and plugs available on request.


Model	Cutting size	Cutting type	Security level***	Also shreds	Nominal motor power
intimus HDD Gladiator	30/12 mm	Strip cut	O-2 T-2 E-2 H-3		3000 W

*Noise level in idle operation. **Depending on the type of material mix ***according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus VZ Multimedia 180

HDD SHREDDER

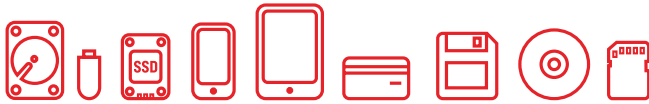

510 2,5" HDDs/H**




120 LITRES

- Low noise level: 70 dB(A)*
- Working width: 160 mm
- The fully automatic Eaton PLC guarantees easy operation and monitoring. The system can be conveniently controlled via a single start and stop button
- The electronic overload detection with intelligent auto-reverse protects the cutting unit from breakage and damage
- A feed flap enables the continuous feeding of media with maximum dimensions of 160 x 200 x 40 mm into a stable feed chute made of sheet steel
- For the most flexible use possible, the intimus VZ MultiMedia 180 is mobile on 2 fixed castors and 2 lockable swivel castors and fits through all standard doors due to its narrow width of 800 mm
- The robust construction with welded profile steel guarantees a long service life
- Shredded material collected in standard 120-litre waste bin
- Handles up to 300 3,5" enterprise HDD's, even with server frame
- Width: 108 cm | Depth: 78 cm | Height: 185 cm
- Weight: Approx. 900 kg



Various voltage options and plugs available on request.

Model	Cutting size	Cutting type	Security level***	Also shreds	Nominal motor power
intimus VZ Multimedia 180	19 mm	Strip cut	O-1 T-1 E-2 H-4		4000 W

*Noise level in idle operation. **Depending on the type of material mix ***according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

intimus HDD Granulator

HIGH-PERFORMANCE GRANULATOR FOR OPTICAL AND MAGNETIC MEDIA




 **70 HDDs (H-5)****  **240 LITRES**

- Low noise level: 70 dB(A)*
- Working width: 330 mm
- Exchangeable screens enable different security levels depending on requirements
- Available screens allow to cover security levels up to H-6
- Shreds HDDs up to 5.25"
- Large feed hopper
- Solid sheet steel housing with removable waste bin
- A hydraulic lift helps to install and deinstall the screens easily
- Automatic reverse
- Automatic switch off after 5 min of inactivity
- Shredded material collected in standard waste bin
- Shredding material: Optical media such as CDs, DVDs and Blu-Rays. Magnetic media such as HDDs, floppy disks, smaller magnetic tapes and credit cards.
- Width: 138 cm | Depth: 77 cm | Height: 213 cm
- Weight: 1060 kg



Various voltage options and plugs available on request.

Model	Security level***	Also shreds	Motor power consumption
intimus HDD Granulator	O-2 - O-4 T-2, T-4, T-5 H-3, H-5, H-6		4000 W

*Noise level in idle operation. **Depending on the type of material mix ***according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

 MADE IN GERMANY

intimus SSD Granulator

HIGH-PERFORMANCE GRANULATOR FOR SSDS



180 SSDs (E-4)**




88 LITRES

- Low noise level: 70 dB(A)*
- Working width: 140 mm
- Designed for the highest security requirements
- Exchangeable screens enable different security levels depending on requirements
- Available screens allow to cover security levels up to E-5
- Slim product design on castors requires little space and fits through all standard doors
- Automatic reverse
- Automatic switch off after 5 min of inactivity
- A hydraulic lift helps to install and deinstall the screens easily
- Bin full sensor
- Shredding material: Electronic media such as SSDs, USBs, memory cards, smartphones and tablets without batteries. Optical media such as CDs, DVDs and Blu-Rays in low volumes. Magnetic media such as floppy disks, smaller magnetic tapes and credit cards in low volumes.
- An Eaton PLC controls the machine and enables modification of the operating parameters
- Width: 116 cm | Depth: 72 cm | Height: 125 cm
- Weight: 430 kg



Various voltage options and plugs available on request.

Model	Security level***	Also shreds	Motor power consumption
intimus SSD Granulator	T-4 – T-6 E-3 – E-5		2200 W

*Noise level in idle operation. **Depending on the type of material mix ***according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

intimus SSD-HDD Granulator

TWO-IN-ONE SOLUTION



70 HDDs (H-5) / 180 SSDs (E-4)** 130 LITRES

- Low noise level: 70 dB(A)*
- Working width HDD: 270 mm
- Working width SSD: 100 mm
- Up to 65% space saving in comparison to a combination of individual SSD and HDD Granulators
- Exchangeable screens enable different security levels depending on requirements
- Available screens allow to cover security levels up to E-5 and H-6
- A hydraulic lift helps to install and deinstall the screens easily
- Shredding material: Electronic media such as SSDs, USBs, memory cards, smartphones and tablets without batteries. Optical media such as CDs, DVDs and Blu-Rays. Magnetic media such as HDDs, floppy disks, smaller magnetic tapes and credit cards.
- An Eaton PLC controls the machine and enables modification of the operating parameters
- Automatic reverse
- Automatic switch off after 5 min of inactivity
- Width: 184 cm | Depth: 90 cm | Height: 153 cm
- Weight: Approx. 1170 kg



Various voltage options and plugs available on request.

Model	Security level***	Also shreds	Motor power consumption
intimus SSD-HDD Granulator	O-2, O-3, O-4 T-4, T-5, T-6 E-3, E-4, E-5 H-3, H-5, H-6		5500 W

*Noise level in idle operation. **Depending on the type of material mix ***according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

3.

Cardboard Recycling

Every company that sends or receives packages is inundated with corrugated boxes. This packaging material is practical and robust - but what happens when it reaches the end of its useful life?

Our solution: Pac(k)-Revolution - give your old cardboards a second life! The intimus PacMaster provides a unique way to recycle corrugated cardboard: it turns used cardboard boxes into valuable cushioning material and packaging filler. The resulting filler materials provide reliable protection during shipping - even for sensitive and heavy goods.

Save money and time with recycled packaging material and do something good for the environment at the same time.



3.1

Cardboard Recyclers



intimus PacMaster S / VS

GIVE YOUR OLD CARDBOARDS A SECOND LIFE



S: 5-7 / VS: 7-11 M³/H**

- Low noise level: 62 dB(A)*
- Cutter feed width/height: 425 mm / 15 mm
- Shreds old and obsolete cardboard into strong packaging material
- Easy amortisation for organisations that frequently receive and send parcels
- Simple, reliable and robust metal construction for intensive use in the packaging warehouse.
- ON/OFF safety switch / emergency stop button
- Size guide on the work surface to ensure accurate cutting of the cardboard and to adjust the size of the padding mats to the required size
- Available as Vario-Speed (VS) version: drive concept optimizes the working speed depending on the shred load
- Optinal also available with dust extractor
- Width: 69 cm | Depth: 47 cm | Height: 95 cm
- Weight: 176 kg for Model S | 185 kg for Model VS



Various voltage options and plugs available on request.

Model	Fill material	Throughput	Cardboard capacity	Cutting Speed	Nominal motor power
PacMaster S	4x110 mm	up to 7 ⁶ m ³ /h	up to 3 layers	240 mm/s	2200 W
PacMaster VS	4x110 mm	up to 11 ⁶ m ³ /h	up to 3 layers	90-290 mm/s	2200 W

*Noise level in idle operation. **Performance may vary depending on feeding type and paper quality. 6 Under test conditions. All data without liability. Subject to technical and optical changes.

4.

Degaussing & Crushing

Data destruction solutions that rely on the physical destruction of hard drives and data tapes provide a level of security that is more than adequate for most applications. However, some agencies and organizations require that the actual information stored magnetically on the hard disk platters or data tape be erased or otherwise destroyed at the microscopic level, prior to disposing or physically destroying the drive.

In order to completely erase data that is stored on magnetic media, it is necessary to expose the media to powerful magnetic fields, while also ensuring the safety of nearby persons. This is why intimus has developed a full line of easy-to-use

degausser systems which can completely erase a hard-drive in seconds, making it impossible to retrieve the stored data.

For organizations desiring or requiring careful documentation of HDD erasure and disposal, the Auditor-Pro systems offer an all-in-one HDD erasure and verification solution.

The degaussers can also be combined with the intimus 360 Crusher and intimus 360 Destroyer to add physical destruction by additionally bending and breaking SSDs and hard drives, including data disks and other internal components, to fulfill the highest safety requirements.



4.1

Degaussers



intimus 8000 S

SPACE-SAVING AND COST-EFFECTIVE DEGAUSSER



1920 HDDS/H*



10000 GAUSS



8 S

- Clean and quiet solution for sanitising magnetic media
- Erases up to 240 standard hard disks (3,5 inch) per hour
- Media Slot Dimension:
Width: 108 mm | Depth: 149 mm | Height: 32 mm
- Single pass pulse technology
- Quick solution with drawer for destroying hard drives individually or in batches

- Internal verification of magnetic field to guarantee safe and complete data deletion
- Protected against external magnetic influences
- Optional Auditor-Pro to generate a certificate of erasure and destruction
- Width: 45 cm | Depth: 34 cm | Height: 15 cm
- Weight: 15 kg



Various voltage options and plugs available on request.

Model	Throughput*	Duty cycle	Magnetic field
intimus 8000S	up to 1920 HDDs/h (1,8 inch)	8 sec	10 000 Gauss, 1 Tesla

* Theoretical throughput.
All data without liability. Subject to technical and optical changes.

intimus 9000 S

HIGH-PERFORMANCE DEGAUSSER



4500 HDDS/H*



10000 GAUSS



3 S

- Clean and quiet solution for sanitising magnetic media
- Complete data erasure in only 3 seconds
- Erases up to 450 standard hard disks (3,5 inch) per hour
- Media Slot Dimension:
Width: 114 mm | Depth: 149 mm | Height: 43 mm
- Single pass pulse technology
- Fast sliding feed solution for destroying hard drives individually or in batches

- Internal verification of magnetic field to guarantee safe and complete data deletion
- Protected against external magnetic influences
- Optional Auditor-Pro to generate a certificate of erasure and destruction
- Width: 58 cm | Depth: 33 cm | Height: 48 cm
- Weight: 27 kg



Various voltage options and plugs available on request.

Model	Throughput*	Duty cycle	Magnetic field
intimus 9000S	up to 4500 HDDs/h (1,8 inch)	3 sec	10 000 Gauss, 1 Tesla

* Theoretical throughput.
All data without liability. Subject to technical and optical changes.

intimus 20000 S Auditor-Pro

NSA/CSS EPL-LISTED DEGAUSSER



1300 HDDS/H*



20000 GAUSS



15 S

- Meets the most stringent government and industry standards for erasing hard drive and tape media
- Clean and quiet solution for sanitising magnetic media
- Erases up to 150 standard hard disks (3,5 inch) per hour
- Media Slot Dimension:
Width: 108 mm | Depth: 149 mm | Height: 32 mm
- Single pass pulse technology
- Drawer feeding solution
- Information display
- Internal verification of magnetic field to guarantee safe and complete data deletion
- Generates Auditor-Pro erasure report with images for audit compliance
- Width: 25 cm | Depth: 63 cm | Height: 43 cm
- Weight: 48 kg



Various voltage options and plugs available on request.

Model	Throughput*	Duty cycle	Magnetic field
intimus.20000SAuditor-Pro	up to 1300 HDDs/h (1,8 inch)	15 sec	20 000 Gauss, 2 Tesla

* Theoretical throughput.
All data without liability. Subject to technical and optical changes.

intimus 40000 S

THE MOST POWERFUL HARD DRIVE DEGAUSSER AVAILABLE



480 HDDS/H*



40000 GAUSS



28 S

- Meets the most stringent government and industry standards for erasing hard drive and tape media
- Suitable for non-functioning or obsolete hard disks and magnetic tapes
- Complete data erasure in under 28 seconds
- Erases up to 60 standard hard disks (3,5 inch) per hour
- Media Slot Dimension:
Width: 108 mm | Depth: 149 mm | Height: 32 mm
- Enables continuous operation
- Shielded – no magnetic radiation to the environment
- intimus scanner and software package included
- Optional Auditor-Pro to generate a certificate of erasure and destruction
- Width: 25 cm | Depth: 63 cm | Height: 43 cm
- Weight: 59 kg



Various voltage options and plugs available on request.

Model	Throughput*	Duty cycle	Magnetic field
intimus40000S	up to 480 HDDs/h (1,8 inch)	28 sec	40 000 Gauss, 4 Tesla

* Theoretical throughput.
All data without liability. Subject to technical and optical changes.

4.2

Crushers



intimus 360 Crusher

HDD DESTROYER




1800 2.5" HDDS/H360 3.5" HDDS/H*

- Bends hard drives up to 5,7 cm in height
- Destruction chamber capacity:
Width: 123,7 mm | Depth: 172,2 mm | Height: 57,4 mm
- Meets evolving technology challenges by increasing the speed and amplifying the crushing power
- Security level H-3 for standalone application
- Robust crush chamber
- Bends, breaks, and mangles hard drives, including dataplatters and other internal components, preventing data recovery
- Destroys solid-state media, flash drives, USB thumb drives, and SSHD controller boards when used with optional intimus SSD Destroyer
- Lightest electric destroyer on the market
- Crushes multiple drives at a time
- Quiet, office-friendly design
- No hydraulics
- Best to combine with degaussing for a full solution for high security requirements
- Width: 19 cm | Depth: 47 cm | Height: 38 cm
- Weight: Crusher: 36 kg / SSD Destroyer: 3,8 kg



Various voltage options and plugs available on request.

Model	Security level**	Crushes	Nominal motor power
intimus 360 Crusher	H-3		During standby: 90 W During crush: 1200 W (max)

* Theoretical throughput. ** according to DIN 66399 (ISO/IEC 21964)
All data without liability. Subject to technical and optical changes.

5.

Consumables

All intimus consumables are in line with the high quality standards and have been exclusively designed for intimus shredders. In our most extensive range of waste bags for shredded paper, there is the right bag for every model.

In addition, using the right oil and regular oiling of the machines, ensures the longevity of the cutting cylinders and provides a consistently high cutting performance to keep your shredder running perfectly.





Shredder bags

CONVENIENT BAGS KEEP WORK AREAS CLEAN

We have different bag sizes for shredders. Choose a bag suitable for the volume of your waste bin. Maximum tear strength.



Strapping for balers

EASY TO USE

High-quality strapping specially developed for use in balers.



Oil 100 ml

GENERAL OILING

Can be used for any shredder. Very easy to use. The oil is sprinkled onto 2-3 paper sheets which are then destroyed. It is not recommended to sprinkle the oil directly onto the blades.



Oil 1 Litre

AUTOMATIC OILING SMALL MACHINES

The 1-litre oil bottles are designed for small shredders like intimus 45/60/85 with automatic oiling. It is important to always keep a spare bottle on hand to ensure proper lubrication of the machine.



Oil 2 Litres

AUTOMATIC OILING LARGE MACHINES

The 2-litre oil bottles are designed for large shredders with automatic oiling. It is important to always keep a spare bottle on hand to ensure proper lubrication of the machine.



Oil 5 Litres

HIGH PERFORMANCE OILING

The 5-litre oil bottles are designed for high-performance equipment. Correct lubrication of the cutting heads guarantees a longer cutting head life.



Lubricating oil for all commercially available shredders	Article number
intimus lubricating oil 100 ml (Packaging unit: 6 pieces)	97644
intimus lubricating oil 1 litre	96917
intimus lubricating oil 2 litres	96945
intimus lubricating oil 5 litres	96946

Shredder bags	Article number
Collecting bag 440x330x600x0,05 mm for intimus 45 (Packaging unit: 25 pieces)	83079
Collecting bag 440x330x800x0,05 mm for intimus 60, FlashEx (Packaging unit: 25 pieces)	97620
Collecting bag 440x330x1200x0,05 mm for intimus 85, 100, 120, 130 (new), 175 hybrid (only CD receptacle) (Packaging unit: 50 pieces)	97461
Collecting bag 600x500x1000x0,05 mm for intimus 175, 175 hybrid (only paper receptacle), OmniShred 85 (Packaging unit: 50 pieces)	99952
Collecting bag 700x500x1200x0,06 mm for intimus 205, 007 SE, 007 SF, 007 SL (Packaging unit: 50 pieces)	99954
Collecting bag 1000x1000x0,12 mm for intimus 115 OmniShred (Packaging unit: 1 piece)	95892
Collecting bag 920x880x1500x0,05 mm for intimus 16.50 (Packaging unit: 25 pieces)	99960
Collecting bag 600x500x1500x0,6 mm for intimus 14.95, 14.87, 16.86, VZ 14.00, intimus baler (Packaging unit: 50 pieces)	99969
Collecting bag 600x380x1100x0,06 mm for intimus 200, H200 (Packaging unit: 50 pieces)	80946

Strapping for balers	Article number
Strapping tape 300 m (Packaging unit: 4 pcs / Tape width: 13 mm)	80804
Strapping tape 400 m (Packaging unit: 4 pcs / Tape width: 11 mm)	80662
Strapping tape 500 m (Packaging unit: 4 pcs / Tape width: 8 mm)	80661

Receptacles	Article number
Receptacle for intimus 130	79299
Receptacle for intimus 175	85829
Receptacle for intimus 007 SE, 007 SF, 007 SL	75987
Receptacle for intimus 175 hybrid (Paper)	94478
Receptacle for intimus 175 hybrid (CD)	94477
Receptacle for intimus 205	95603
Receptacle for intimus FlashEx	93933

The Shredder Company

www.intimus.com



intimus International GmbH
Bergheimer Straße 6-16
88677 Markdorf / Germany

ANY QUESTIONS?
GET IN CONTACT:

sales.de@intimus.com
T. +49 (0)7544 60-0
www.intimus.com